



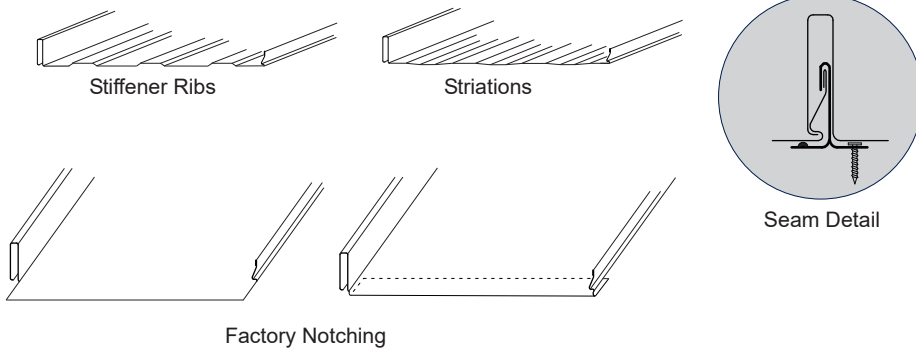

TBC-TRULOC

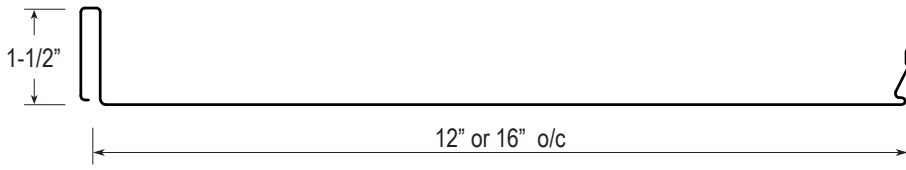

TBC-TRULOC is the #1 choice for standing seam metal roofing in light commercial or residential applications. The 1-1/2" height and continuous positive seam engagement offer exceptional strength and weathertightness. The separate galvanized clip allows the panel to thermally expand & contract, which is critical with longer length applications.

TBC-TRULOC incorporates a corrosion resistant AZ50 Galvalume® substrate along with an industry leading Kynar 500®/ Hylar 5000® paint coating. Available in both 26 and 24 gauge this system is backed by a robust limited lifetime warranty on residential installations.

Produced in lengths up to 50 feet with a recommended minimum slope of 3:12.

**Lifetime
Warranty**



CHARACTERISTICS

- Floating Clip System
- Thermal Expansion/Contraction
- Continuous Positive Engagement
- Optional Factory Notching
- Ultra Durable Kynar 500® Colors
- Superior AZ50 Corrosion Resistance
- Limited Lifetime Warranty

TESTING

- UL-580 Class 90 Wind Uplift
- UL-790 Class A Fire Rated
- UL-2218 Impact Resistance
- ASTM E1592 Wind Uplift



888-GO-BRYER | P 253.735.1824 | F 253.735.1785 | sales@thebryercompany.com

www.thebryercompany.com

Flashing & Accessories

<p>Eave</p> <p>E-12</p>	<p>Modified Eave</p> <p>E-22</p>	<p>Peak</p> <p>P-14</p> <p>* Varies depending on roof slope</p>	<p>Sidewall</p> <p>SW-1138</p>	<p>Gable</p> <p>G-14138</p>
<p>Z Closure</p> <p>Z-1112</p>	<p>Vented Endwall</p> <p>VEW-10</p>	<p>Endwall</p> <p>EW-10</p>	<p>Standard Ridge</p> <p>R-10</p>	<p>Vented Ridge</p> <p>VR-10</p>
<p>Prow</p> <p>PR-104</p>	<p>Pitch Change - High/Low</p> <p>PCHL - 10</p>	<p>Pitch Change - Low/High</p> <p>PCLH - 10</p>	<p>Back Pan</p> <p>BP - 10</p>	<p>Valley</p> <p>V - 10</p>
<p>J Closure</p> <p>JC-1158</p>	<p>Perimeter Cleat</p> <p>PC - 10</p>	<p>Perforated Angle</p> <p>PA - 10</p>	<p>Offset Cleat</p> <p>OC - 10</p>	<p>J Flashing</p> <p>JF - 1158</p>
<p>Base</p> <p>B-1134</p>	<p>Outside Corner</p> <p>OS - 10</p>	<p>Inside Corner</p> <p>IS - 10</p>	<p>Modified Truss Screw</p> <p>#8 Sharp - Phillips 3/4", 1", 1-5/8"</p>	<p>Clip/Flange Screw</p> <p>#10 Sharp - Pancake/Phillips 1", 1-1/2"</p>
<p>Wood Screw</p> <p>#10 Type S - w/ Washer 1", 1-1/2", 2"</p>	<p>Self Driller Screw</p> <p>#12 - #3 Point - w/ Washer 1", 1-1/2", 2"</p>	<p>Stitch Screw</p> <p>#12 x 3/4" Type A - w/ Washer</p>	<p>SD Stitch Screw</p> <p>1/4 x 7/8" #1 Point - w/ Washer</p>	<p>Rivet</p> <p>1/8" #43 Stainless</p>
<p>Clip</p> <p>1-1/2" Galvanized</p>	<p>Butyl Mastic Tape</p> <p>5/32" x 1/4", 1/8" x 3/4", 3/32" x 3/8", 3/16" x 7/8"</p>	<p>Foam Closure</p>	<p>Pipe Flashing</p> <p>EPDM & Silicone 1/4" - 24" O/D</p>	